


BPC-51121

2 Ports 1000BASE-T Bypass Network Adapter

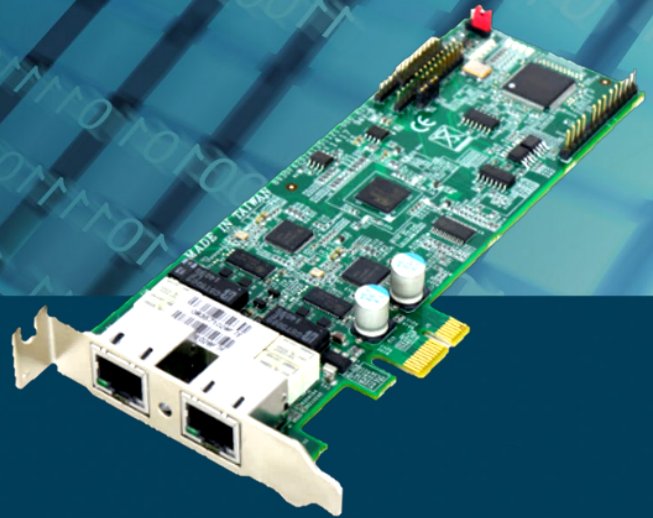

- Intel I210 PCI-Express 2.0 MAC+PHY controller
- 2 x RJ-45 GbE Ports
- 1 x Standard PCIe Gen2
- Audio-Video Bridging (AVB) support (802.1Qav)
- Low-profile , half-Length PCIe card
- Easy Configuration of Normal/Bypass mode and WDT timer

Specifications

Model Name	
Platform	
Form Factor	Standard NIC Module
LAN Controller	1 x Intel I210AT
Ethernet Port	2 x RJ45 GbE Port(s) on board, Up to 2 x Ethernet Port(s) with maximum 2GbEGbE bandwidth
Bypass	1 segment(s) on board
Bus Type	1 x Standard PCIe Gen2
Compliance	IEEE 802.3az Energy Efficient Ethernet, IEEE 1588 Precision Clock Synchronization, IEEE 802.1 Qav Audio-Video Bridging (AVB) Support
Dimension (WxDxH)	64mm x 168mm x 15mm (2.56" x 6.72" x 0.6")
Operation & Certifications	
Operating Environment	Temperature: 0 - 55°C (32 - 131°F), Humidity: 20 - 90% RH
Storage Environment	Temperature: -10 - 70°C (14 - 158°F), Humidity: 5 - 95% RH
Certification	CE / FCC
OS Support	Linux / Windows / FreeBSD

